



# Japan Industrial Standard Test 日本工業標準測試



**Heating Test:**  
Gas burners gradually raise the temperature of the air-tight test furnace to 925c in one hour. Within two hours, the temperature has reached 1010c.  
**熱力測試:**  
將夾萬放入在密封燃爐內,在一小時內將溫度升至925c,在二小時內再將溫度升至1010c.

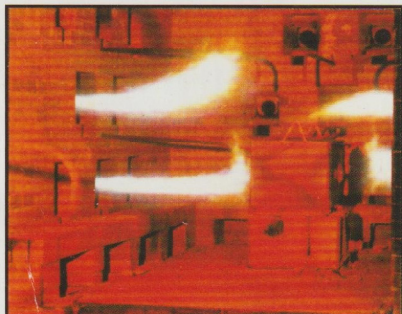

**Dropping Test:**  
The safe is then subjected to a drop and impact test. It is dropped from a height of 4 meters to simulate a situation where the safe might fall from the upper to lower floor of a building.  
**撞擊測試:**  
將夾萬從4米高掉下撞擊,以測試夾萬防撞力.

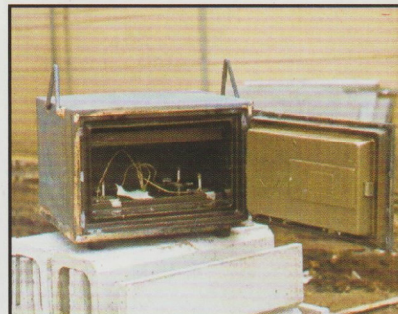

**Test Result:**  
After these tests, upon opening, the contents of the safe remain intact as expected-even the colour of the papers did not change.  
**測試結果:**  
經過加熱及撞擊測試後,夾萬內之物件保持完好,連紙張的顏色也不變.


Specifications Subject To Change Without Prior Notice.

Eiko Co., Ltd. (Tokyo Japan) [www.eiko.co.jp](http://www.eiko.co.jp)

ISO 9001



CERTIFICATION:



JIS FIRPROOF TEST RESULT:

